


## How to remove


Turn over the upper part of the case to raise the iPhone/iPod touch slightly and pull it out straight.

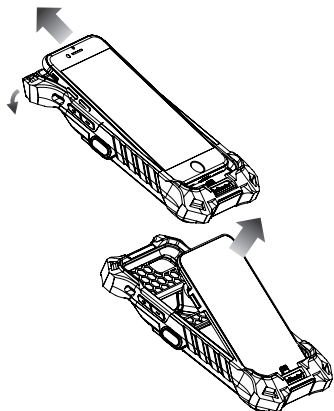


\* Be careful to handle it as it may cause Lightning connector breakage if the angle is too much and pulling it up while connecting iPhone/iPod touch.

## How to attach

- 1 Installation method  
Check that the silicon and plastic parts are firmly fitted.
- 2 Put the lower part of the SLED/DOCK first and attach the SLED/DOCK to the case.

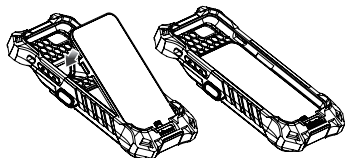

- 3 Cover the iPhone/iPod touch with a case. Place the upper part of the case slightly and slide the iPhone/iPod touch along the side groove.

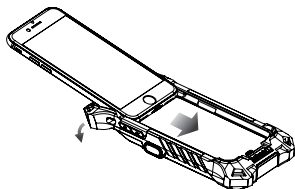


# Dock How to Use

## User Manual



### How to attach and remove the AsReader/STRONG-CASE Gen to and from AsReader SLEDs/DOCKs

Push in until the Lightning connector is inserted.

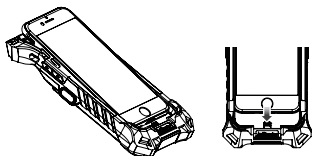

- 4 The iPhone/iPod touch is tightly pressed and mounted so that the silicon is not twisted or too much. If you feel it is hard to press the trigger button on the SLED/DOCK, the silicon may be misaligned. Remove the iPhone/iPod touch and SLED/DOCK once to correct the misalignment.

